

# Release Note of Android (v2.5)

## Summary

Release Date	Apr/14/2016 KST
Release Type	Regular release
Release Files	<a href="#">Self-installation Image</a> (MD5SUM: a6dedc9ac79a9fbb6911936f4a64ccac)

Android release 2.5 can be upgraded through network from the earlier version, v1.7 for example, please read [this](#) for more detail.

## New updates

- USB sound card Analog input is enabled.
  1. HDMI audio output + Webcam sound input(Mic) : Ok
  2. USB sound card audio output + USB sound card audio input : Ok
- Support Google Voice recognition like "OK Google". Credit to Voodik.
  1. <http://forum.odroid.com/viewtopic.php?f=137&t=20368#p134892>
- Enable to select mirror update server.
- Fixed GPS library. <http://forum.odroid.com/viewtopic.php?f=113&t=18347#p126751>
- Show navigation bar automatically when ODROID-VU7 resolution detects.
- Update kodi 16.0 Jarvis.
- Added a few requested USB-Multitouch VID/PID.
   
<http://forum.odroid.com/viewtopic.php?f=51&t=15495>

```
#define USB_VENDOR_ID_ELO          0x04E7
#define USB_DEVICE_ID_ELO_TS2515  0x0022
#define USB_DEVICE_ID_ELO_TS2700  0x0020
```

## Update Instruction


### Self Installation

You can install the release to your [MicroSD](#) or eMMC with the tool **dd** in Linux or **Win32DiskImager** in Windows. Please refer [this](#) for more detail.

We have been reported that some of users can not watch Android logo on their TV while installing even though installation is proceeded. So please wait for 5 minutes since power on and red and blue LED is on. If blue led is started blinking then installation is proceeding, ODROID-C1 will reboot when finished.

## Upgrade Installation

Since Android release 2.0, we provide you update package which can upgrade your device without rewrite your SD card or eMMC. This package can be downloaded and upgrade on ODROID Utility.

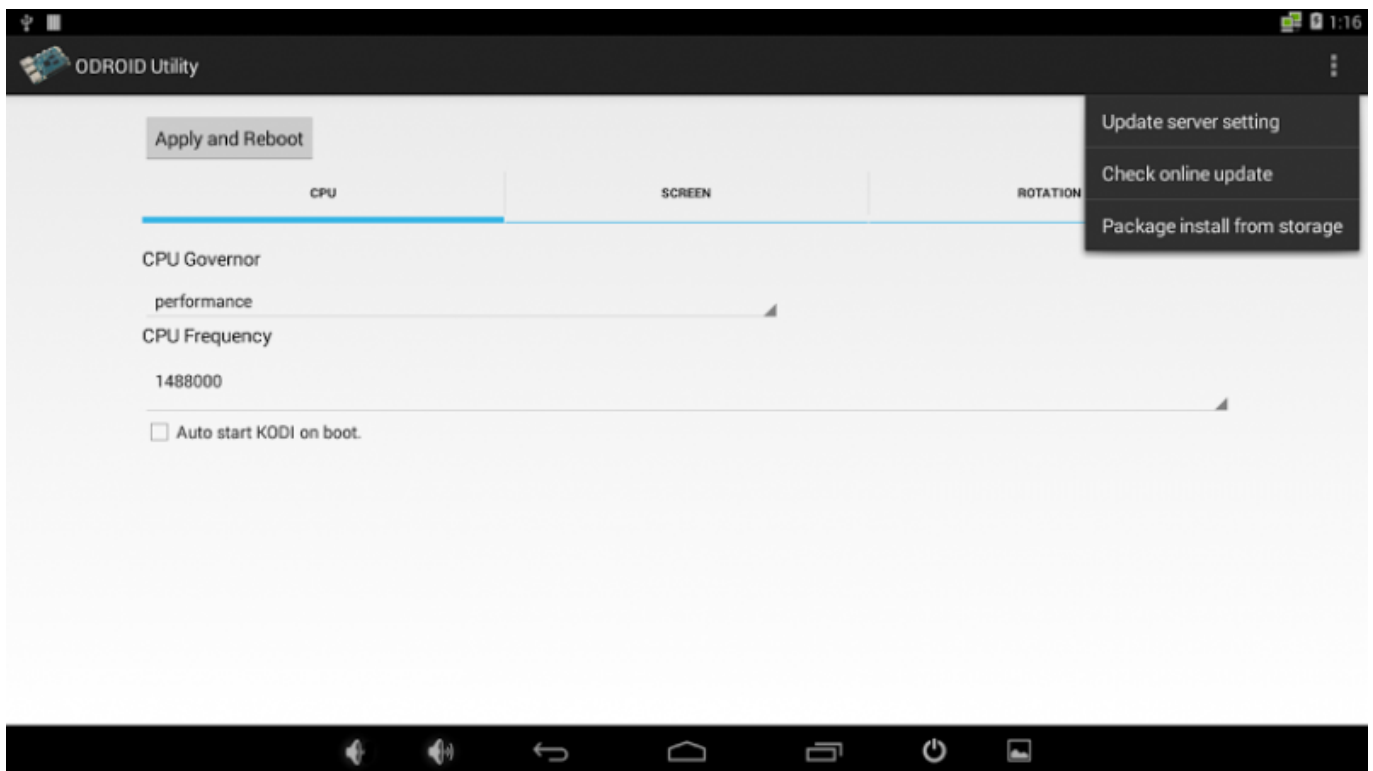

- Update server setting
  - You can set your own update server and path where you upload your custom update package. Ordinary users does not need to run this and change the detail, it is already set with Hardkernel official download server for ODROID-C1.
- Check online update
  - This will start to check latest update from Hardkernel official download server and start to download and install if new version is discovered. Your ODROID-C1 device must be connected through the network.
- Package install from storage
  - This will help you to install the official upgrade package downloaded manually or custom update package. You can store a update file to **external storage** and select it to install.

### For earlier version users

We provide you yet another [upgrade patch application](#) which can help you to upgrade your ODROID-C1 device, you can download the application and install to your current device by **adb**

```
adb install RecoveryUpdater.apk
```

Once you install the application, launch it and click the button **Update**. It will proceed to update necessary binaries on your device and start to reboot. Then you will be able to see the menus explained above on ODROID Utility. If you success on this, you can remove the application - [RecoveryUpdater.apk](#).

## Fastboot Update

You can update the release by **fastboot** if you have [MicroSD](#) or eMMC already Android installed. If you have **USB-Serial kit**, you can enter to **Fastboot** mode when you execute the command **fastboot** on U-boot command line. Or if you run execute **reboot fastboot** from Android shell command line, your **ODROID-C1** will reboot and get into **fastboot** mode immediately. You can check if your **ODROID-C1** is attached via USB with the command **fastboot devices** in your desktop.

```
$ sudo fastboot flash bootloader u-boot.bin
$ sudo fastboot flash dtb meson8b_odroidc.dtb
$ sudo fastboot flash boot kernel
$ sudo fastboot flash recovery recovery.img
$ sudo fastboot flash logo hardkernel-720.bmp
$ sudo fastboot flash system rootsystem.img
$ sudo fastboot flash userdata userdata.img
$ sudo fastboot flash cache cache.img
$ sudo fastboot reboot
```

## How to checkout

You can checkout Android source tree, please refer [this page](#) for more detail. **Please note, Android source tree is uploading and would be completed in 1-2 days.**

## Android

```
$ mkdir odroid-c1
$ cd odroid-c1
$ repo init -u https://github.com/hardkernel/android.git -b
s805_4.4.2_master
$ repo sync
$ repo start s805_4.4.2_master --all
```

## ODROID Utility

```
$ git clone --depth 1
https://github.com/codewalkerster/android_packages_apps_Utility.git -b
s805_4.4.2_dev_master
```

## Reference boot.ini

[boot.ini](#)

```
ODROIDC-UBOOT-CONFIG
```

```
# Resolution Configuration
# 'hdmimode' must be one of below to configure display resolution
within
# supported by your TV or monitor.
#   Symbol          | Resolution
# -----+-----
#   "vga"           | 640x480
#   "480p"          | 720x480
#   "576p"          | 720x576
#   "800x480p60hz"  | 800x480
#   "800x600p60hz"  | 800x600
#   "1024x600p60hz" | 1024x600
#   "1024x768p60hz" | 1024x768
#   "1080i50hz"     | 1080I@50Hz
#   "1080p24hz"     | 1080P@24Hz
#   "1080p50hz"     | 1080P@50Hz
#   "1080p"         | 1080P@60Hz
#   "720p"          | 1280x720
#   "800p"          | 1280x800
#   "sxga"          | 1280x1024
#   "1360x768p60hz" | 1360x768
#   "1366x768p60hz" | 1366x768
#   "1440x900p60hz" | 1440x900
#   "1600x900p60hz" | 1600x900
#   "1680x1050p60hz" | 1680x1050
#   "1920x1200"     | 1920x1200
setenv hdmimode "720p"

# HDMI/DVI Mode Configuration
# This will enforce the singal type of display
# "hdmi" - For HDMI interface
# "dvi" - For DVI interface
setenv vout_mode "hdmi"

# Overscan offset configuration
# All offsets are zero and can be tuned by manual or ODR0ID Utility
setenv top "0"
setenv left "0"
setenv bottom "0"
setenv right "0"

# UHS Card Configuration
# Uncomment the line below to __DISABLE__ UHS-1 MicroSD support
# This might break boot for some brand/models of cards.
#setenv disableuhs "disableuhs"

# CEC Configuration
setenv cecconfig "cecf"

# Disable IR remote
```

```
setenv ir_remote "1"

# Booting
setenv bootargs "root=/dev/mmcblk0p2 rw console=ttyS0,115200n8
no_console_suspend vdaccfg=${vdac_config}
logo=osd1,loaded,${fb_addr},${outputmode},full hdmimode=${hdmimode}
cvbsmode=${cvbsmode} hdmitx=${ceccconfig} vout=${vout_mode}
${disableuhs} overscan_top=${top} overscan_left=${left}
overscan_bottom=${bottom} overscan_right=${right}
androidboot.serialno=${fbt_id#} ir_remote=${ir_remote}"
setenv bootcmd "movi read boot 0 0x12000000; movi read dtb 0
0x12800000; bootm 0x12000000 - 0x12800000"
run bootcmd
```

From:  
<http://wiki.odroid.com/> - **ODROID Wiki**

Permanent link:  
[http://wiki.odroid.com/odroid-c1/os\\_images/android/v2.5](http://wiki.odroid.com/odroid-c1/os_images/android/v2.5)

Last update: **2017/08/02 08:10**

