


7 PIN(J7)

The external pin header (J7) can be connected to an audio device that supports **SPDIF** or **I2S**. Note that the header pins are not mounted by default.

Pin Information


Name	PIN
GND	1
SPDIF Output	2
5.0V	3
I2S MCLK	4
I2S LRCLK	5
I2S SCLK	6
I2S Data Output	7

Square soldering pad is Pin #1 as below picture.

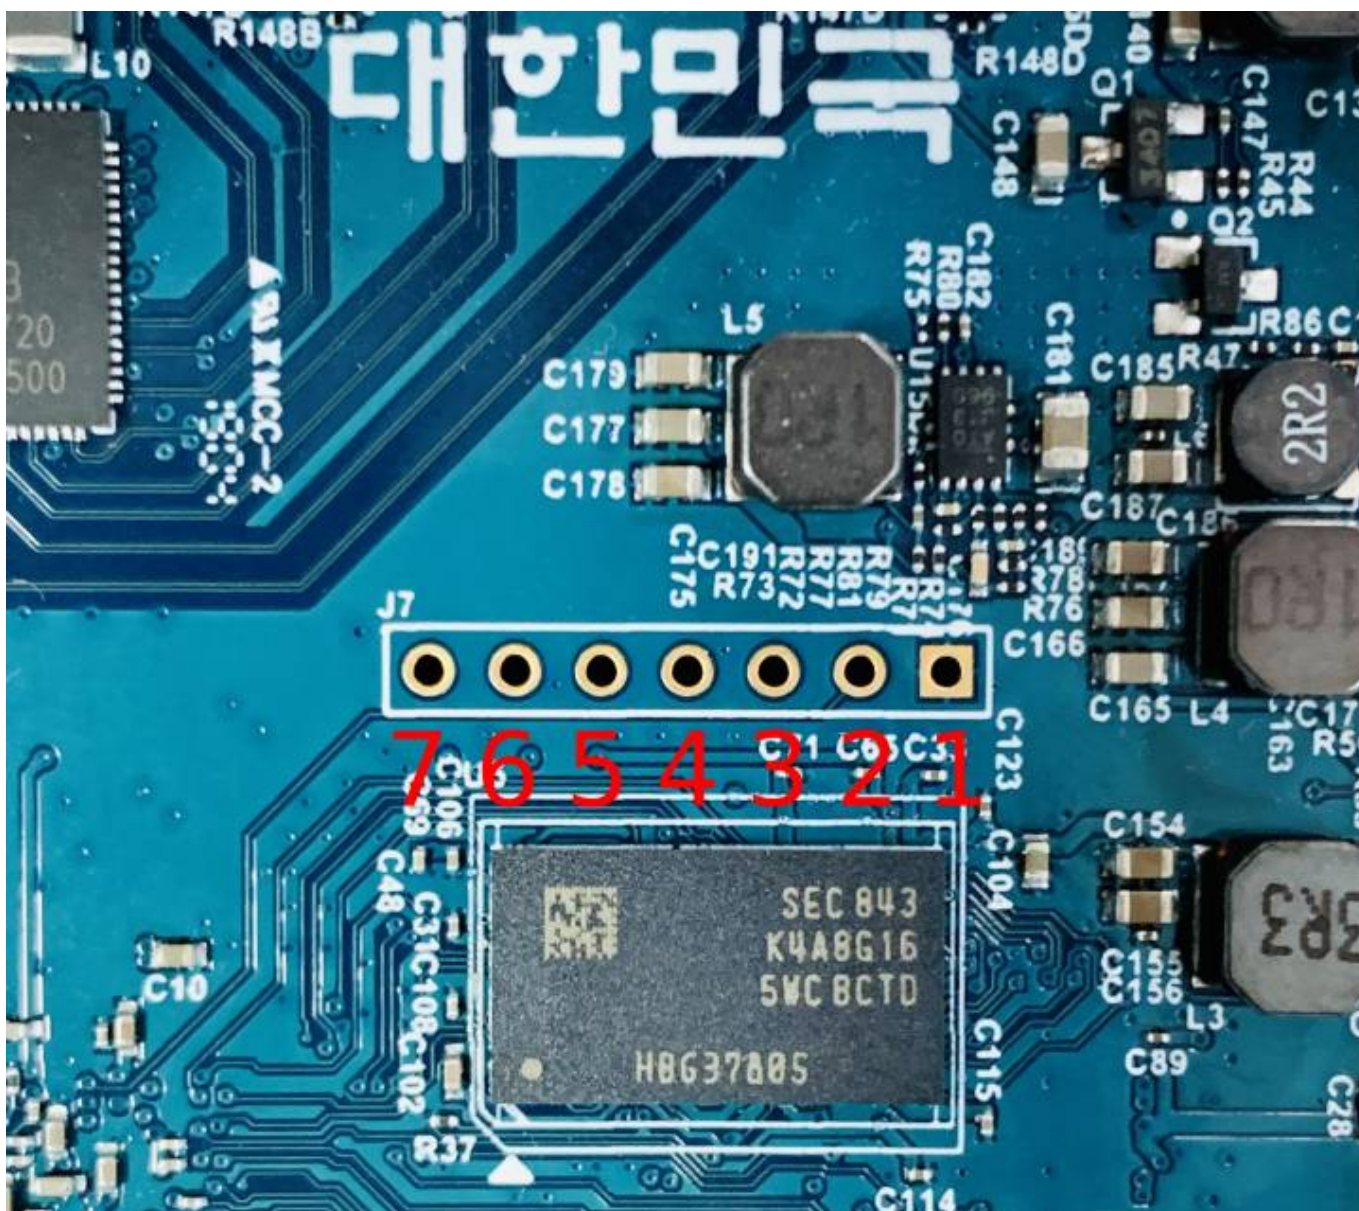

How to use


It is recommended to solder the pins for easy use.


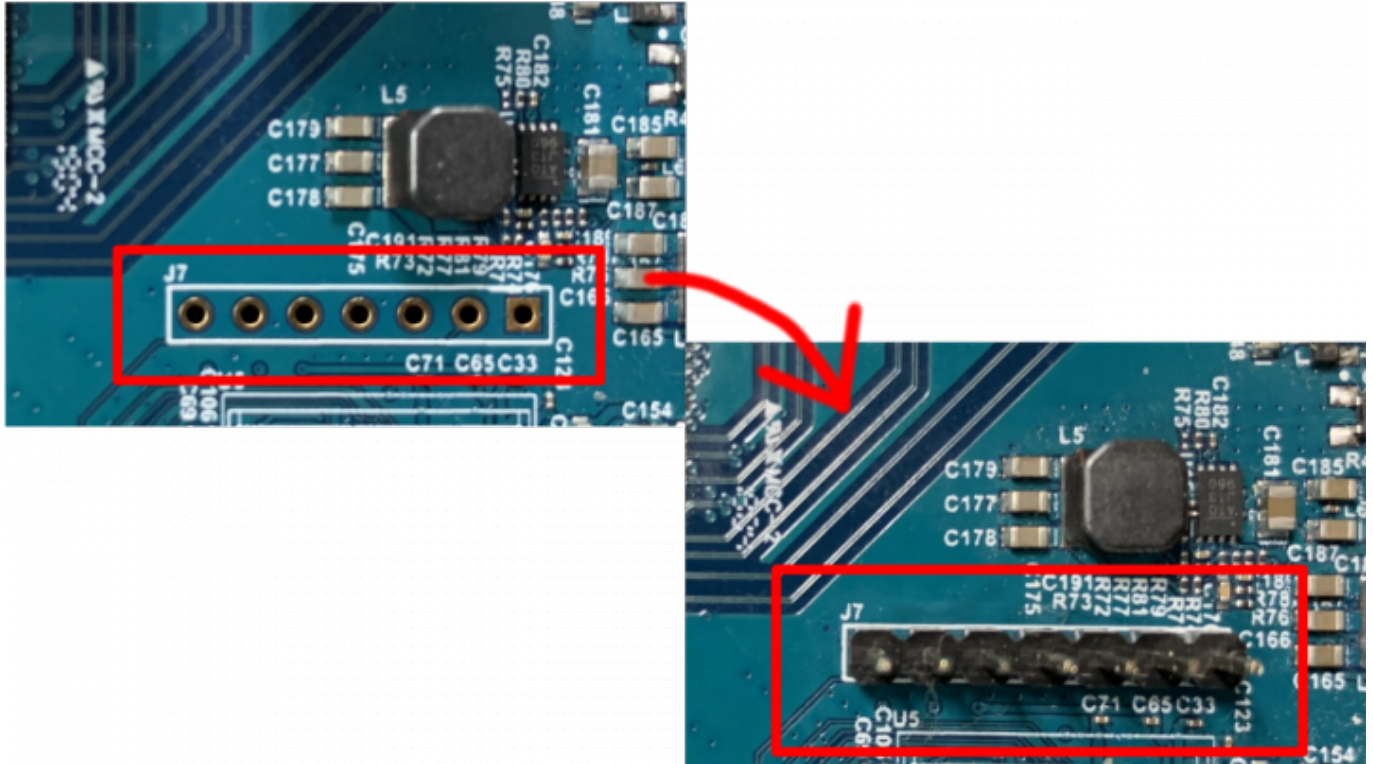



Android

ODROID Settings helps you to select an audio interface - **HDMI**, **Lineout** (3.5mm audio jack), **SPDIF** or **I2S** - supported by the ODROID-N2.

After selecting an output device, your selection will be applied to the device after a few moments.

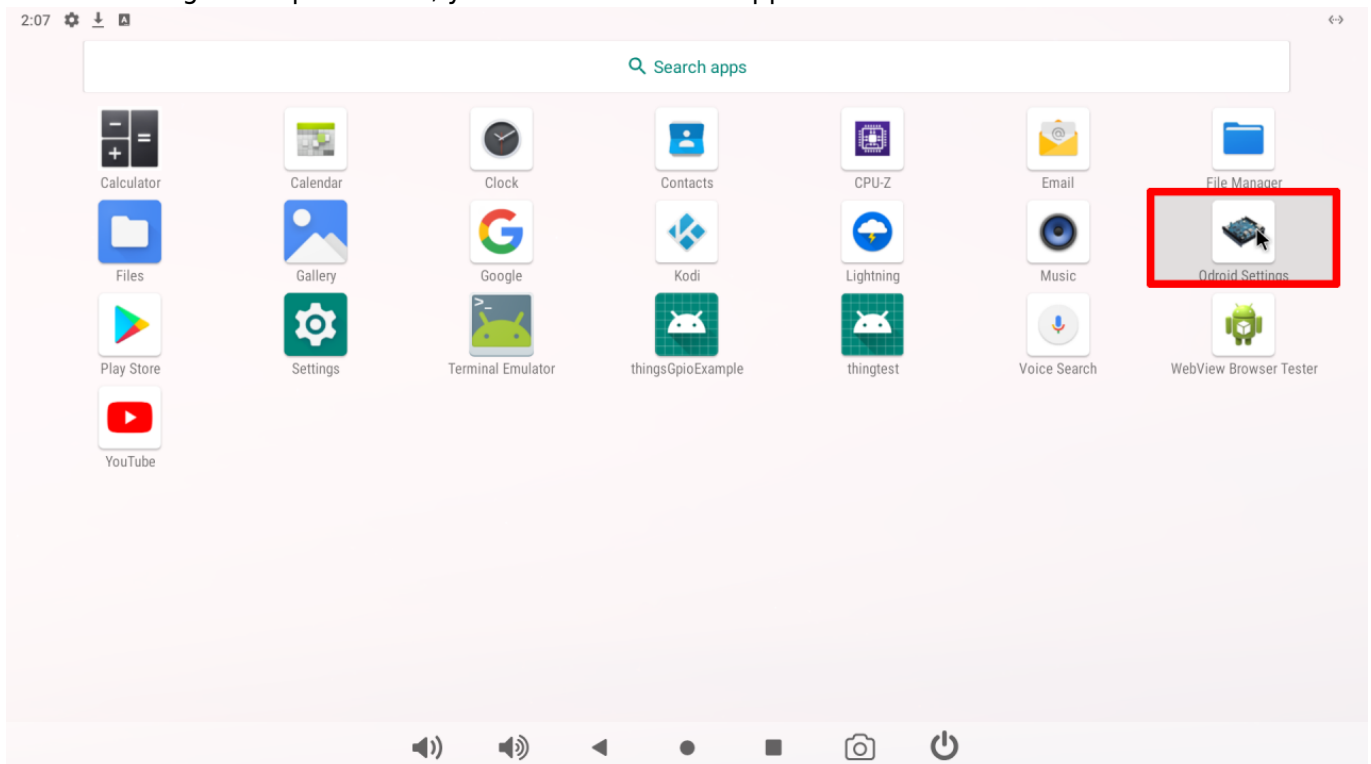

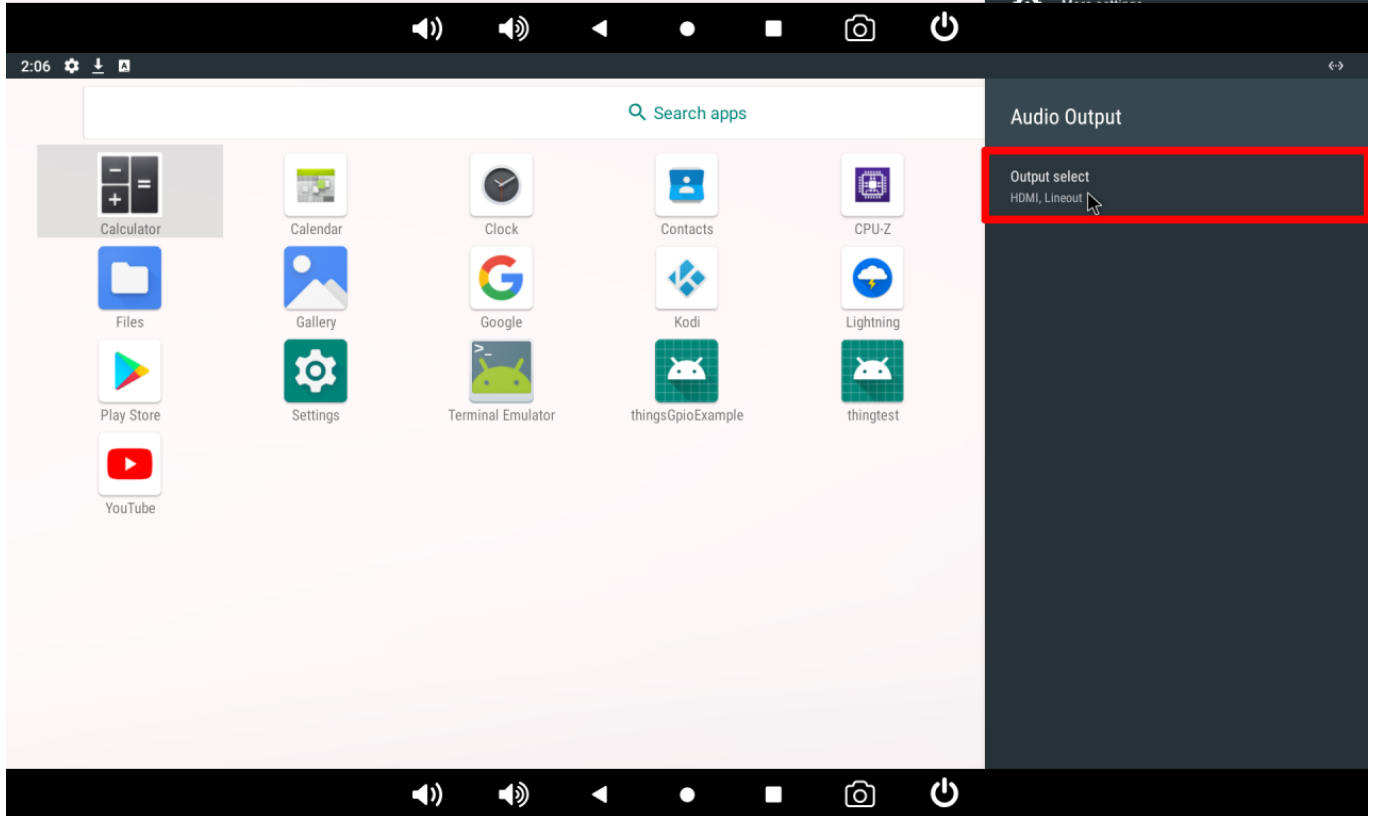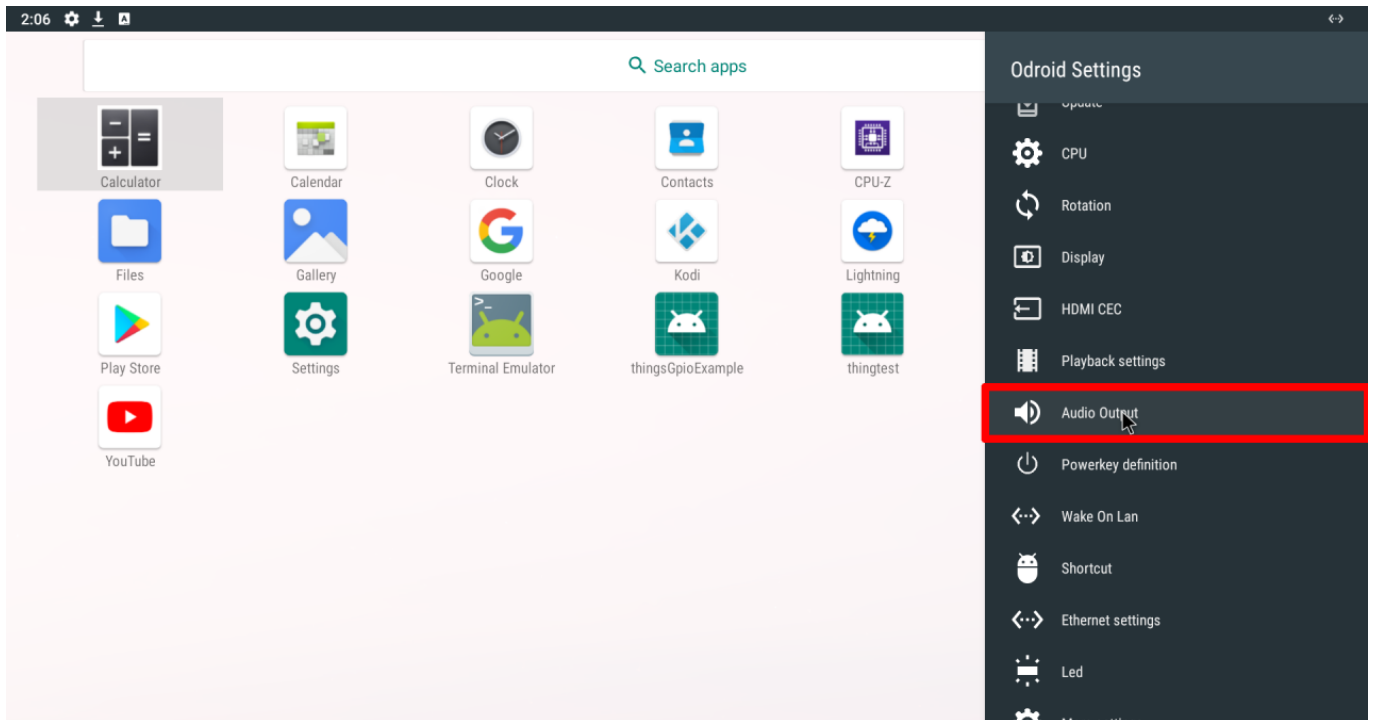

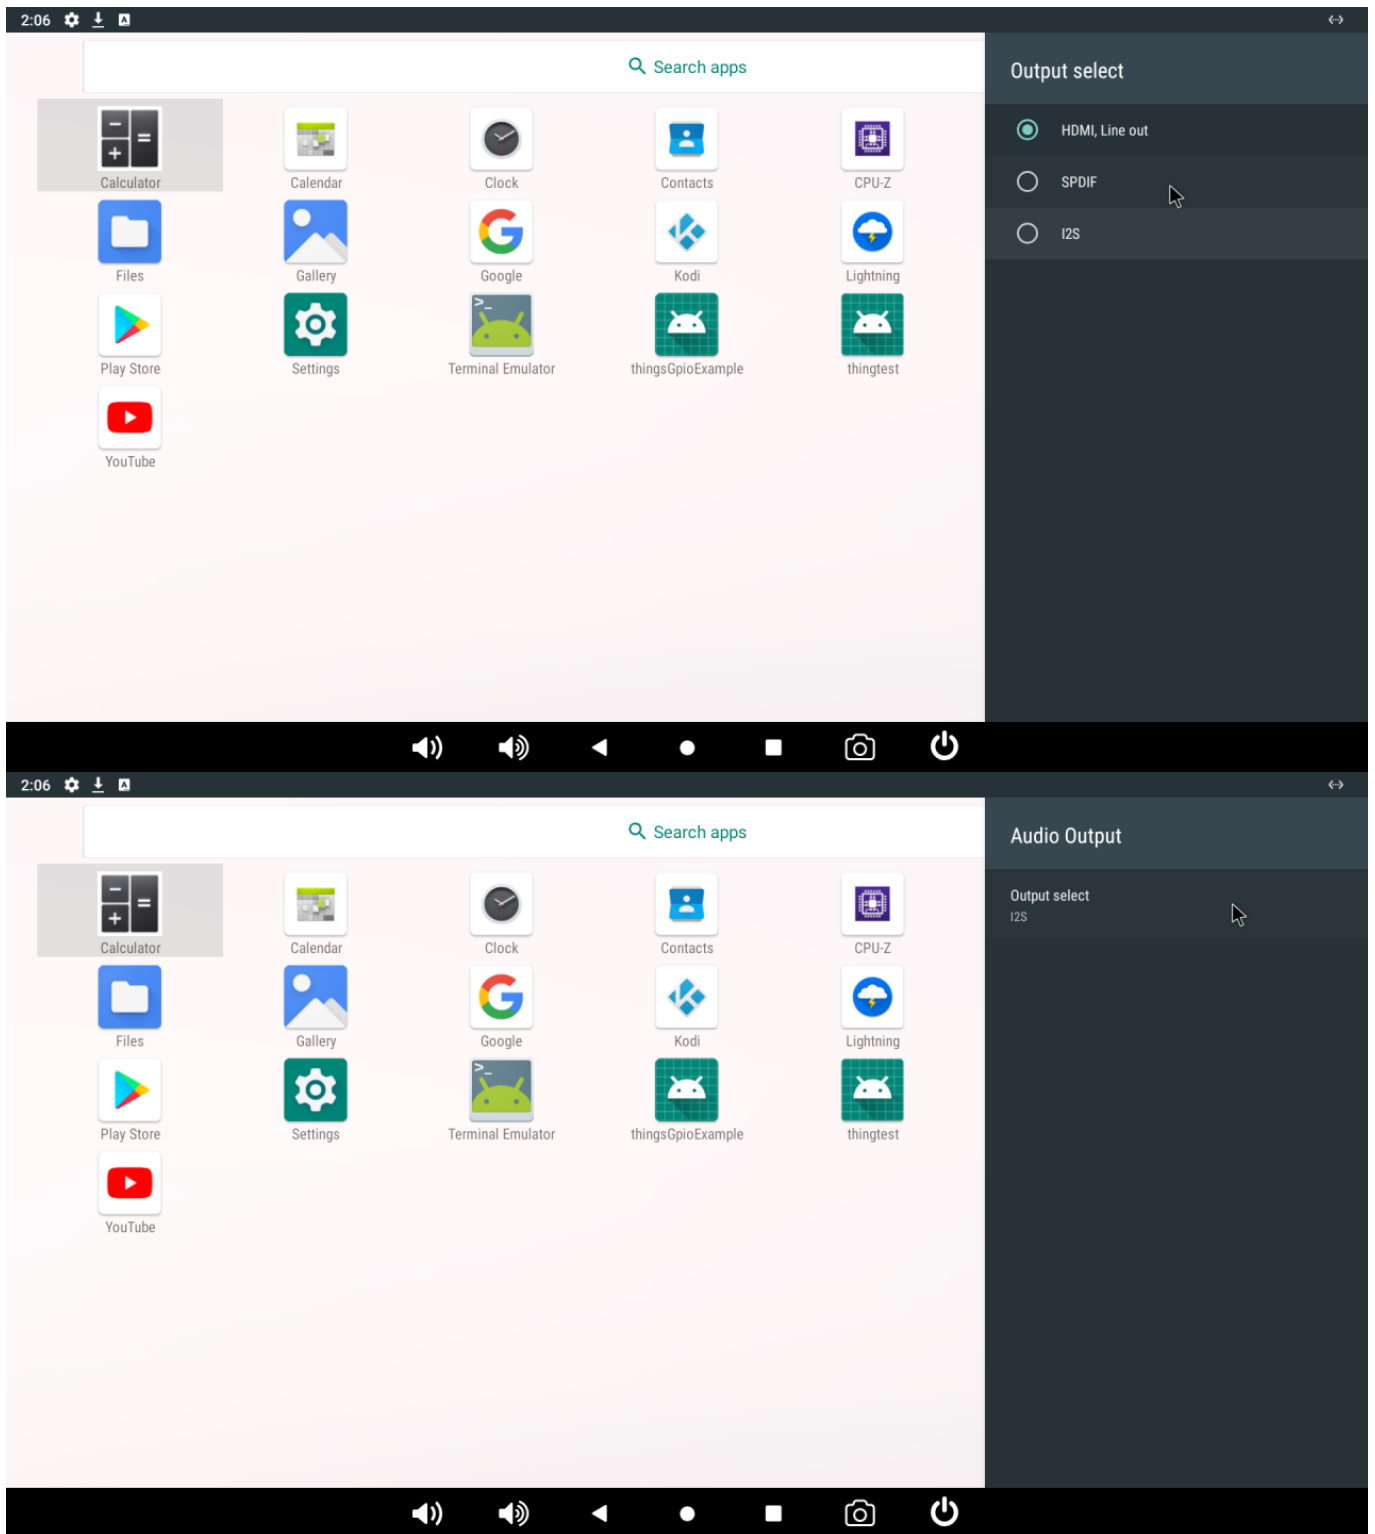

From:
<http://wiki.odroid.com/> - **ODROID Wiki**

Permanent link:
http://wiki.odroid.com/odroid-n2/application_note/external_connector/7pin

Last update: **2020/07/31 01:56**

